




Innovatively Creative ...

TRUST the AIRxperts 


WWC Series

Water Cooled Packaged Water Chillers

energy efficiency



55 Years of **SABRO**

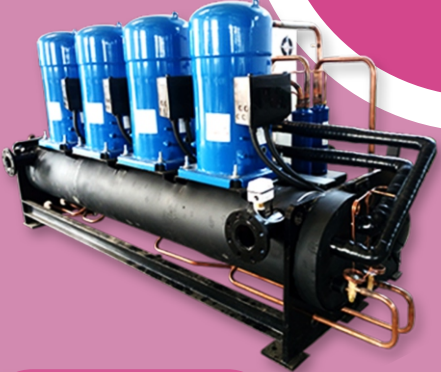

 consistent performance

Cost effective



persistent optimization & performance verification



Aspire to inspire



Commercial Air Conditioning
proven, reliable control software



Available with Environmental Friendly Refrigerant + DC INVERTER

WWC Series

Water Cooled *Packaged* Water Chillers

Commercial Type Chillers

WWC Series

Water Cooled *Packaged* Water Chillers

Sabro made water-cooled packaged water chillers provide chilled water for all commercial/industrial air-conditioning applications. Sabro WWC Series models are suitable to maintain stable cooling even in the high ambient conditions with the combination of suitable cooling tower.

MODEL	COMP. HP	COMPRESSOR TYPE	WATER FLOW RATE(US GPM) EVAPORATOR	WATER FLOW RATE(US GPM) CONDENSER	COOLING CAPACITY BTU/HR	KCAL/HR
WWC 040-S	1x3 .75	Hermetic Scroll	7.24	9.04	36179	9123
WWC 050-S	1x5 .0	Hermetic Scroll	9.81	12.25	49050	12369
WWC 060-S	1x6 .0	Hermetic Scroll	11.36	14.19	56774	14316
WWC 080-D	2x3 .75	Hermetic Scroll	14.48	18.08	72358	18246
WWC 100-D	2x5 .0	Hermetic Scroll	19.62	24.50	98100	24737
WWC 120-D	2x6 .0	Hermetic Scroll	22.72	28.37	113548	28633
WWC 160-S	1x16	Hermetic Scroll	28.94	36.14	144717	36492
WWC 160-D	2x8.0	Hermetic Scroll	28.90	36.08	144500	36438
WWC 200-D	2x10	Hermetic Scroll	39.10	48.82	195500	49298
WWC 200-Q	4x5 .0	Hermetic Scroll	39.24	49.00	196200	49475
WWC 240-Q	4x6.0	Hermetic Scroll	45.42	56.71	227096	57265
WWC 240-D	2x12	Hermetic Scroll	45.53	56.85	227651	57405
WWC 260-D	16+10	Hermetic Scroll	48.49	60.54	242467	61142
WWC 320-D	2x16	Hermetic Scroll	57.89	72.28	289434	72985
WWC 370-D	21+16	Hermetic Scroll	66.44	82.96	332200	83769
WWC 420-D	2x21	Hermetic Scroll	74.99	93.63	374966	94553
WWC 500-D	2x25	Hermetic Scroll	89.10	111.25	445524	112345
WWC 640-D	2x32	Hermetic Scroll	117.04	146.14	585176	147560
WWC 700-D	2x35	S.H. Reciprocating	124.35	155.26	621750	156783
WWC 800-D	2x40	S.H. Reciprocating	140.83	175.84	704125	177555
WWC 1050-T	3x35	S.H. Reciprocating	186.53	232.90	932625	235175
WWC 1200-T	3x40	S.H. Reciprocating	211.24	263.75	1056188	266333
WWC 1280-Q	4x32	Hermetic Scroll	237.67	296.75	1188352	299660
WWC 1400-Q	4x35	S.H. Reciprocating	248.70	310.53	1243500	313566
WWC 1600-Q	4x40	S.H. Reciprocating	281.65	351.70	1408250	355110
WWC 1920-H	6x32	Hermetic Scroll	351.11	438.40	1755528	442681
WWC 2100-H	6x35	S.H. Reciprocating	373.05	465.80	1865250	470349
WWC 2400-H	6x40	S.H. Reciprocating	422.48	527.50	2112375	532665

Th ecapacities are based on 55°F(12.4°C) entering water temperature and 45°F(7.22°C) leaving water temperature from chiller and condenser water entering temperature at 85°F(29.4°C) & leaving at 95°F(35°C).

honesty, integrity

Sabro... good quality service

longer product life

essential every day

Made In
PAKISTAN
Since 1969

www.sabro.com.pk

comfort zone
air conditioning