



T H E C O M P A N Y Y E A R S



Pioneering
HVAC Manufacturing in Pakistan



C O R P O R A T E
P R O F I L E &
C a t a l o g u e



Inspired By The Stimulus to Grow through Knowledge, interlaced with the zeal and sheer commitment, of an enthusiastic team and Grippd by the Obsession of Three Brothers of turning the dream-into reality, Sabro has evolved, grown and expanded since its inception in 1968.

It was the fruit of commitment, hope and hard work that enabled us to be the pioneers of HVAC manufacturing in Pakistan, exporting to over 22 countries, encapsulating 3 continents. We now thrive as an agile manufacturer for a complete range of HVAC manufacture including Chillers(Hermetic-Scroll/S.H. Reciprocating/Screw), Self-Contained units, Air-Side Equipment, Mini Split Units & a menagerie of customized manufacture tailored to suit every HVAC requirement of the customer.

For over five decades, Sabro has been a trusted brand name that has exceeded expectations nationwide & internationally, catering to the needs of both domestic as well international customers.

Contact information:



contact@sabro.com.pk



<https://web.facebook.com/SabroTechnologiesPk>



[www.linkedin.com/company/
Sabro-air-conditioning-pakistan/](http://www.linkedin.com/company/Sabro-air-conditioning-pakistan/)

Sabro Production Plant:

Sabro Technologies(Pvt.) Ltd.
#270, Kahuta Road, Islamabad

Sabro Head Office:

#77/78, St: 10, I-9/2, Islamabad
+92 51 4433006
Exclusive Distributor in Pakistan


Sabro Engineering & Services

< Sales - Distribution - Service >



Innovatively Creative ...

TRUST the AIRxperts

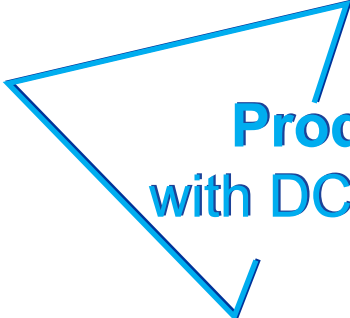

**Product-Line
with DC INVERTER
Technology**



- ASC DC Inverter Models
- ASU DC Inverter Models
- AWC DC Inverter Models
- WWC DC Inverter Models
- WCP DC Inverter Models
- AHU DC Inverter Models



DESICCANT De-Humidifier
Process Air: 100 - 2000




**Custom Make Available
Up to 12000 of Process Air**




Innovatively Creative ...

TRUST the AIRxperts

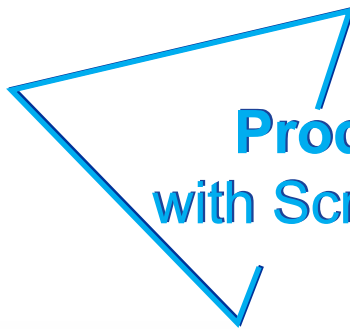

**Product-Line
with Screw Compressors
Technology**

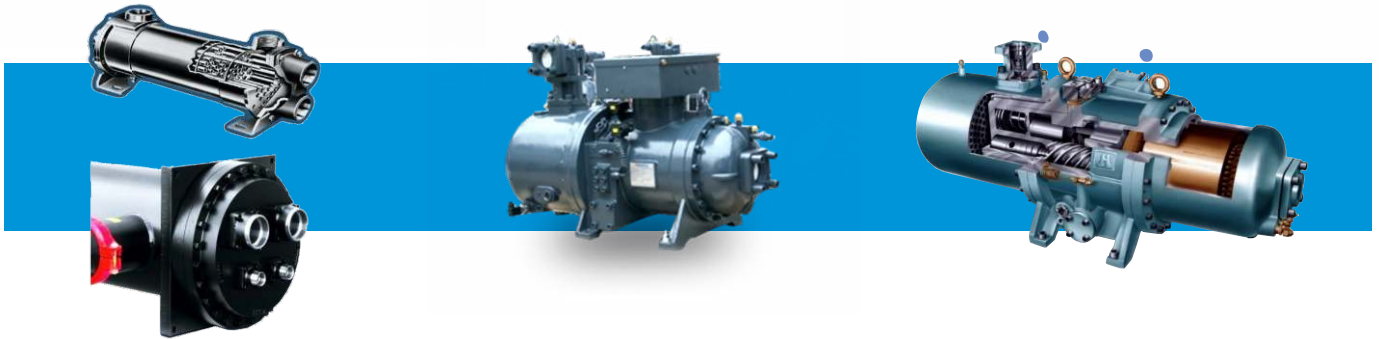



Innovatively Creative ...

TRUST the AIRxperts



**DC 24VAC PACKAGE UNIT
FOR VEHICLE AIR-CONDITIONING**

Specially Designed,
For Buses, Trucks, Containers, Boats &
Hovercrafts.



**SPECIAL
PURPOSE
EXCLUSIVE FEATURE**
AIR CLEANING UNIT

Various effective purification and disinfection techniques (AL, G4 refine paper Filter, BAG & HEPA Filters, Bi-Polar ionizer etc.) are employed to purify and disinfect indoor air. Hospitals and clinics use our purifiers to disinfect and purify air in endoscope department, patient wards, operating room etc. to reduce the risk of airborne infection.



Contents

Company Synopsis	01
Message by Chairman	03
Product Range	04
BMS Air Conditioning	26
Specifications of HVAC Models	27
Manufacturing Facilities	44
Clientele	53
Export Market	56
Achievements	57
Country Sales and Services Network	61

COMPANY SYNOPSIS

Prologue

Sabro group (Pvt.) Ltd. is a pioneer heating ventilation and air conditioning (HVAC) system company in Pakistan. The history of Sabro corporate dates back to more than five decades of continuous achievements.

It started in the year 1968, when a dream became a reality. Three Brothers laid the foundation for one of the biggest Air Conditioning Company in South East Asia region. After 55 years of continuous efforts and hard work, Sabro stands tall in the field of HVAC.


Sabro strongly believes in self-reliance hence our corporation consists of following sister organizations which work hand in hand with Sabro manufacture of various products;

[S.a. Brothers \(Pvt.\) Ltd Islamabad.](#)

[Sabro Technologies \(Pvt.\) Ltd Islamabad.](#)

Sabro established the first ever Research and Development facility back in 1986, ever since importance has been provided for the manufacturing of products that possess durability and reliability.

Sabro is the first ever and the largest Pakistani HVAC original equipment manufacturer that is exporting to Afghanistan, Bahrain, Bangladesh, Kuwait, Keniya, Morocco, Malaysia, Oman, Qatar, Saudi Arabia, Srilanka & UAE.

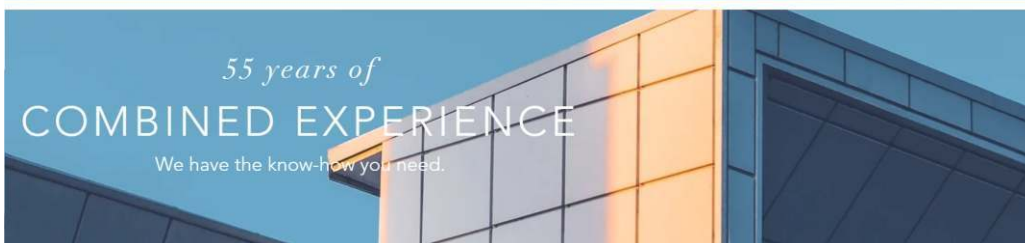

Mission Statement

- I- To abide by Islamic rules and ways.
- II- To sincerely back up our business alliance.
- III- To support our employees through better career opportunity.
- IV- To provide highest possible return on shareholders investments.
- V- To fulfill our customer's desire for quality product worth their price.


Quality Assurance & Control

- I- Develop and maintain a total quality culture within the organization.
- II- Develop and harness the full capabilities of each person,
by continuous training.
- III- Refine and update work processes.
- IV- Eliminate all waste, rejects, defective and rework,
To "Get it right the first time".

All products manufactured must pass all stringent quality testing procedures. A standard inspection and testing plan is followed for all jobs. Quality is a continuous process at Sabro. This means that we continuously concentrate on improving our own performance to ensure that our clients continuously benefit from it. Our aim is to meet your expectations every time. We take a proactive stance towards quality moving beyond QC to QA, so you can be confident that your requirements will be met with best quality-consistently.

- I- Obtained ISO 9002 Certification in 1997.
- II- Obtained ISO 9001 Certification in 2000.
- III- Obtained BS EN ISO 9001:2008 in 2014
(HVAC Equipment(OEM) From NQA).



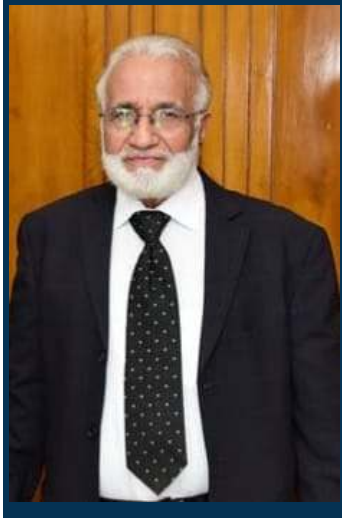

We are grateful that history has endowed Sabro with continuous opportunities. Since the establishment of Sabro in 1968, we have led technology advancement in the field of air conditioning as sole manufacturer of HVACR products in Pakistan. Our sole commitment to satisfy and serve our customers has been an unshaken constant.

It was a thrilling and eventful ride when my two brothers and myself started this company from zero in 1968, we made a small air handling unit from very limited resources for cinema theater. It is of great price that the unit is still operational to prove that it came from a great culture of quality innovation and continues customer satisfaction. Our mission statement is our driving force as we grow future to excel global market, our role in consumer comfort envision has become a trusted household brand.

The sixth decade of excellence dawns upon us with new horizons of not only geographical expansion but also in the state of the art technology innovation. Continuous improvement leads us to the diverse ventures like consumer and industrial electronics, software, CNC machine tools and even plastics. Time has constantly proved us in past five decades. The one thing that remains unparalleled is our commitment to customer.

My Number One Goal has always been to ensure that our clientele, suppliers as well employees are treated fairly and with respect. We have achieved this goal, establishing long standing glowing relationship.

We evidently plan to take this forward with even more excitement and energy.

Ch. Muhammad Siddique


PRODUCT RANGE

Sabro has led the industry with smart innovations, cutting-edge technology that Enhances consumers' lifestyles.

We find solution, to satisfy genuine consumer needs through products with unique, progressive features and design “**Standardized + Customized + Specialized**” products that are technologically advanced, modern in the appearance and always a step ahead of the competition.

Sabro is convinced that a **truly superior product that meets all consumer expectations** can only be made by strictly adhering to very highest standards of quality. For this very reason, we do not compromise on quality in any way.

01. ASC (Air Cooled Self Contained Unit)
02. ASU (Air Cooled Split Packaged Unit)
03. LUCRE (Precision Room Air conditioners)
04. WCP (Water Cooled Packaged Unit)
05. AWC (Air Cooled Packaged Water Chillers)
06. WWC (Water Cooled Packaged Water Chillers)
07. FCU (Fan Coil Units)
08. AHU (Air Handling Units)
09. Fan Series (FCI/BCI)
10. Hot Water Generators
11. Desiccant/Refrigerated Dehumidifiers
12. Self-Generating electrical steam Humidifiers
13. Exhaust / Ventilation Fans (FC/BI)
14. Coils for water / D.X. Application
15. Air Curtains
16. Trolley Mounted Mobile A/C for PAF
17. EM Series
18. EHJ Series
19. EXJ Series
20. ECJ Series
21. Cabinet Heater
22. DX/Evaporative Cooling With Furnace Heating Unit
23. DC Inverter VRF Systems
24. ARC Series
25. Trolley Mounted mobile A/C for Pak Navy
26. Special Make for Pak Railway
27. Air cooled/Water cooled, Screw Chillers
28. EVJ Series
28. Duct Heater
29. SPF(Plug Fans/Centrifugal ventilators) Series
30. Centrifugal Chillers

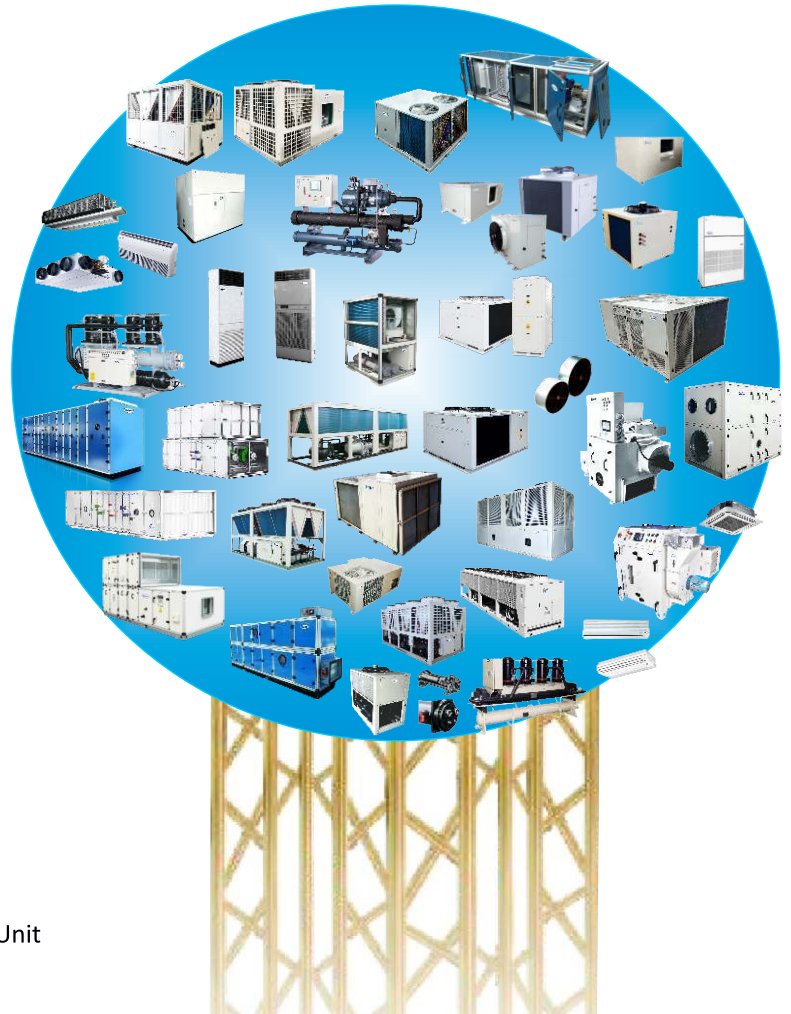

Comprehensive testing & total quality monitoring is the benchmark of our product, from pre-production Research & Development through production to Customer Services. Our quality control system ensures that our products are developed according to well quality standards.


NEW LAUNCH--ASC MODELS, ASU MODELS, WCP MODELS, AHU MODELS, AIR-COOLED WATER-COOLED CHILLERS ARE AVAILABLE WITH DC INVERTER TECHNOLOGY.

SMART SERIES SPLIT

SABRO



0.75Ton For small room & small cabins

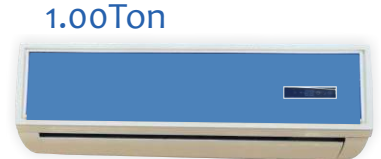

1.00Ton



1.25Ton



1.50Ton



2.0/2.5Ton

VRF System for Commercial Use

- Efficient Design
- High Efficiency
- Energy Modeling
- Energy Control
- Quiet Operation
- Benefits For Users
- Precise Comfort Control
- Dehumidification Control
- Benefits For Installers
- oem with Sabro trademark

Variable refrigerant flow (VRF) is an air-conditioning system configuration where there is one outdoor condensing unit and multiple indoor units. The term **variable refrigerant flow** refers to the ability of system to control the amount of refrigerant flowing to multiple evaporators (indoor units), enabling the simultaneous use of many evaporators of different capacities and configurations connected to a single condensing unit.



- The arrangement provides an individualized comfort control and simultaneous heating and cooling in different zones.

Commercial Type Air Conditioner

ASC Models Series

Self Contain Package Air-Conditioner

(3.25 Ton to 42.25 Ton)

Sabro air-cooled self-contained air conditioners are single package air conditioners. These are factory charged, tested and internally wired for rapid installation. There is no additional refrigeration work required at installation site.

These units are designed to provide maximum efficiency at tropical conditions.

The weather proof design of units permits the complete installation of units outside the building. These units consist of compressor, condenser coil, condenser fan and motor, evaporator coil, evaporator fan and motor and all other necessary electrical-refrigeration controls equipped with accessories.

If required, the units can be provided with reverse cycle / duct heater arrangements as optional feature.



Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

Commercial Type Air Conditioner

ASU Models Series

Split Package Air-Conditioner

(3.25 Ton to 42.25 Ton)

Sabro air-cooled split air conditioners comprise of two sections.

A Condensing unit for outdoor installation

An Evaporator unit for indoor installation

The indoor unit may be standard ducted model, floor standing ducted model “V” or floor standing free discharge model “VC”.

Both sections are connected with refrigerant copper piping at installation site. The ASU unit is designed to provide maximum efficiency at tropical conditions.

The weather proof design of units permits the complete installation of units outside the building. These units consist of compressor, condenser coil, condenser fan and motor, evaporator coil, evaporator fan and motor and all other necessary electrical-refrigeration controls equipped with accessories.

If required, the units can be provided with reverse cycle / duct heater arrangements as optional feature.



Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

Commercial Type Air Conditioner

ASU-CU(CF) Models Series

Top Ducted Split Evaporator With
Air Cooled Condenser-(Centrifugal Fans)

Sabro uniquely designed ASU-<CU(CF)> models series comprises of two sections.

An Evaporator unit for indoor installation (Floor mounted, Vertical ducted top discharge).

A Condensing unit for the indoor installation (Floor/ceiling mounted front ducted discharge with centrifugal fans).

The indoor unit may be standard ducted model, floor standing ducted model "V" or floor standing free discharge model "VC".

Both sections are connected with refrigerant copper piping at installation site. The ASU unit is designed to provide maximum efficiency at tropical conditions.

These units consist of compressor, condenser coil, condenser fan (Centrifugal Type) and motor, evaporator coil, evaporator fan (Blower) and motor and all other necessary electrical-refrigeration controls equipped with accessories.

If required, the units can be provided with reverse cycle / duct heater arrangements as optional feature.

Available with Environment Friendly Refrigerant + DC Inverter



FCU (Fan Coil Unit)

300 to 2000 CFM

Available with water proof motor arrangement

Available with acrylic protective coating

CSU (Cold Storage Unit)

16000 to 106500 BTU/Hr

Available in single & double skin, Panel thickness-37mm-standard to 50 mm-optional, PU foaming & Polystyrene insulation

Available with Custom make High static pressure applications

Available with sterile air conditioning gadgets

Available with explosion proof set-up

Larger Capacities Models are available on Demand



Commercial/Scroll Chillers

AWC Models Series

Air Cooled Water Chiller

(2.7 Ton to 147.5 Ton)

Sabro commercial type Air-cooled water chillers provide chilled water for all commercial/industrial air-conditioning applications.

Air-cooled water chillers are suitable to maintain stable cooling even in the high ambient conditions.

These units are also available with reverse cycle arrangement for hot water(heating) in winter season.



Evaporator Chiller Series



WWC Models Series

Water Cooled Water Chiller

(3.0 Ton to 176 Ton)

Sabro commercial type Water-cooled water chillers provide chilled water for all commercial/industrial air-conditioning applications.

Water-cooled water chillers are suitable to maintain stable cooling even in the high ambient conditions with combination of suitable cooling-tower.



Evaporator Chiller Series



Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

PRODUCT RANGE

Commercial Type Screw Chillers Air/Water Cooled Screw Chillers

Air cooled Screw Chillers
(28.0 Ton to 220 Ton)

Water cooled Screw Chillers
(63.5 Ton to 490 Ton)

Sabro technologies is a wholly owned subsidiary of Sabro group Pvt., Ltd., specializing in research, development and manufacturing of screw type products. The company sells water cooled screw chillers with optimum COP & EER(HIGH ENERGY EFFICIENCY RATIO).

Adhering to the principle of integrity, innovation and excellence, the company constantly creates new products every year according to the market demands. The water cooled screw chillers/ water source heat pumps have the features of high energy efficiency ratio, high reliability, high efficiency, and high automation etc., which continues to lead the domestic refrigeration energy industry, opening a new era of high efficiency screw type of products.



Centrifugal Chillers

WCC Models Series

Water Cooled Centrifugal Chiller
(500 Ton to 3000 Ton)

Sabro technologies is a wholly owned subsidiary of Sabro group Pvt., Ltd., specializing in research, development and manufacturing of centrifugal type products. The company sells water cooled centrifugal chillers with optimum COP & EER(HIGH ENERGY EFFICIENCY RATIO).

Adhering to the principle of integrity, innovation and excellence, the company constantly creates new products every year according to the market demands. The water cooled centrifugal chillers/ water source heat pumps have the features of high energy efficiency ratio, high reliability, high efficiency, and high automation etc., which continues to lead the domestic refrigeration energy industry, opening a new era of high efficiency screw type of products.

Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand



Sabro Fan Series FC, BI & Plug Fans

Forward curve & Backward inclined Fans
(300 - 129,000 CFM)

SPF (Plug Fans)
(295 - 41200 CFM)

Sabro technologies is a wholly owned subsidiary of Sabro group Pvt., Ltd., specializing in research, development and manufacturing high efficiency centrifugal fans. Their ratings are based on AMCA tests and procedures for air performance, sound, and FEG.

The volume flow of the FC & BI Fan Series ranges from 300 to 129,000 CFM.

The volume flow of the SPF Series ranges from 295 to 41,200 CFM. Some of the features and characteristics of these fans are: compact structure, high efficiency, low noise, and low power consumption. These fans are ideal for use in central air conditioning systems, in purifiers. They are also suitable for use in a variety of other ventilation applications.

Adhering to the principle of integrity, innovation and excellence, the company constantly creates new products every year according to the market demands and continues to lead the domestic HVAC energy industry, opening a new era of high efficiency centrifugal fan type of products.



Desiccant Dehumidifiers CFM(Process Air):100 to 2000

Sabro technologies is a wholly owned subsidiary of Sabro group Pvt., Ltd., specializing in research, development and manufacturing of Desiccant type Dehumidifiers. The company sells desiccant dehumidifiers with optimum effect(RELATIVE HUMIDITY) as per specific requirement at installation space.

Adhering to the principle of integrity, innovation and excellence, the company constantly creates new products every year according to the market demands. Sabro-make Desiccant dehumidifiers have the features of high energy efficiency ratio, high reliability, high efficiency, and high automation etc., which continues to lead the domestic/commercial refrigeration energy industry, opening a new era of high efficiency desiccant type of products.

Custom Make: UP To 12000 CFM(Process Air)

Larger Capacities Models are available on Demand



Commercial Type Air Conditioner

AHU Models Series

Central Station Air Handling Unit

Sabro' air - handling units are used for installation in any commercial buildings, subways, exhibition centers, hotels, restaurants, operational theaters, shopping malls, pharmaceutical factories and micro-processor plants. These units are designed to give central air conditioning i.e. cooling, heating, humidifying, pre heating, mixing and filtering with sets of standard and optional components sections.

The standard model consists of flat filter section, with internal insulation of 30mm thick polyurethane. (50mm thick polyurethane insulation-On Demand).

These units are available in different arrangements like HDT(horizontal draw through), VDT(vertical draw through), MZBT(multi - zone blow through), SZBT (single - zone blow through), DS (double skin).

Exclusively designed and produced with thermal break aluminum profile.

Sabro' AHUs Accord with Pharma Grade hvac (design for pharmaceutical facilities)


Available with Thermal Break Aluminum Profile



Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

PRODUCT RANGE

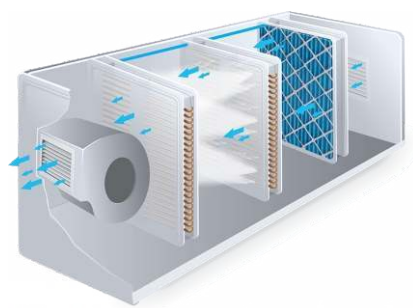

Larger Capacities Models are available on Demand

PRODUCT RANGE



Larger Capacities Models are available on Demand

Commercial Type Air Conditioner

LUCRE Series

Precision Air Conditioner

To maintain the Precise Environmental Conditions, SABRO (Lucre Series) has produced a new range of precision air conditioning units.

Precision units have been designed and developed to meet the air conditioning needs of data based processing centers, digital telephone exchanges, computer rooms & other technological environment which radiate high heat.

Sabro's Precision Air Conditioning range is designed for a wide range of applications where close control, high precision air conditioning is essential, including data center cooling, medium & low density server milieu, telecom switching stations, medical operating theaters & clean-hygienic environs.



WCP Models Series

Water cooled Package AC

(44000 to 510000 BTU/Hr)

Available in single & double skin, Panel thickness-37mm-standard to 50 mm-optional, PU foaming & Polystyrene insulation

Available with Custom make High static pressure applications

Available with sterile air conditioning gadgets

Available in customized construction of vertical type to meet space limitations for critical installations

Available with explosion proof set-up

Available with Hi-Grade Thermal Break Profile

Available with acrylic protective coating



Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

Commercial Type Air Conditioner

Packaged

Environmental Control Unit
With Evaporative Cooling &
Diesel Furnace Heating

Evaporating Cooling

Evaporative Pad 85% Efficiency.

Reduces DX / chilled water cooling requirements for fresh air.

Cuts mechanical cooling costs 25% to 65%.

Provides 100% make-up air cooling at half the cost of mechanical equip cooling.

Increases heat exchanger life.

Brings in outside air and exhausts all stale air, smoke, odors, and germs.


Helps maintain natural humidity levels, which benefits both people and furniture.

Reduces static electricity.

Does not need an air-tight structure for the maximum efficiency, so building occupants can open doors and windows.

Optional

Mechanical cooling by adding DX coil & Compressors.

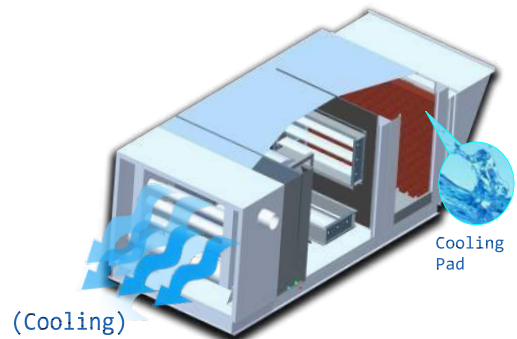

Commercial Type Air Conditioner

Packaged

Environmental Control Unit
With Evaporative Cooling &
Diesel Furnace Heating

Diesel Furnace Heating


Normally the heat exchanger is capable to rise the air temperature to 32°C(90°F)

There special design do not permit the combustion gases to mix in the air and all the time healthy air is supplied to the room.

Indirect fired heating technology is the most efficient and economical than any other heating option such as electric heating and heat pump equipment.

Optional

Mechanical cooling by adding DX coil & Compressors.
(If Required with both heating/cooling modes)

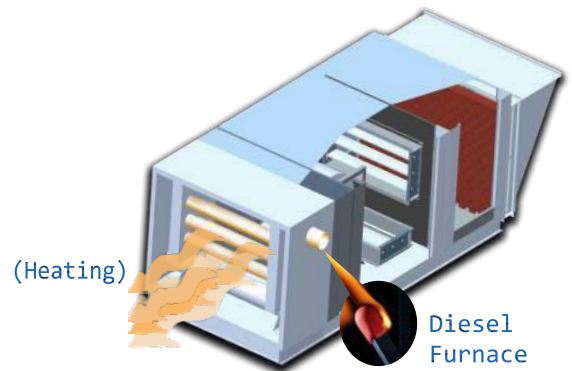

Commercial Type Air Conditioner

**Self-Contain Package Type AC
For Pakistan Railway**

...and the spark ignites at Sabro

Indigenous Make For Public Services

Self Contained Packaged Type AC

For Pakistan Railway

Sabro

Available with Environment Friendly Refrigerant (R-407 C/410 A) + DC INVERTER

Larger Capacities Models are available on Demand

Commercial Type Air Conditioner

**Self-Contain Package Type AC
Special Make**



Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

Commercial Type Air Conditioner

5HP-10HP
Hermetic
Scroll



... and the spark ignites at Sabro

Commercial Air Conditioners

Floor Standing Split Type Air Conditioner
4.25 RT - 8.50 RT **EXJ Series**

New.
Tough.
Effective.



Larger capacity Models are available on Demand



Available with Environment Friendly
Refrigerant (R-407 C/410 A) + DC INVERTER

Durable, bake painted, metal body
Service friendly, draw-through design for easy coil cleaning
Synthetic filter media protected by aluminum mesh & frame,
Ideal for industrial, commercial and residential applications,
Hidden thermostat to avoid public misuse,
Perfect for high-foot-fall areas,
Custom color options.



Commercial Type Air Conditioner



ECJ Series
1-4.25 HP



EHJ Series
1-5 HP



Air Cooled Condensing Unit



EVJ Series



Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

Commercial Type Air Conditioner



Air Curtain Series
36", 48" & 60" Width



Fan Coil Unit
300 to 2000 CFM



Electric Unit Heater
1KW-12 KW



Cassette Type Unit
1.5-5 HP



Sabro Heater
1KW-12 KW



Larger Capacities Models are available on Demand

PRODUCT RANGE

Commercial Type Air Conditioner



Elec. Steam Humidifier
3.0-6.0 KG/HR



Cold Storage Split
3.5HP-20HP



Fresh Air Unit
300-2000 CFM



Mini WCP Series
0.9HP-3.2HP



Refrigerated De-Humidifier
23.0 LIT/Day
47.3 LIT/Day
94.5 LIT/Day



Hot Water Generator
3.0-30 TONS



Exhaust/Ventilation Fan
300-129000 CFM



Desiccant Dehumidifier
100-2000 CFM



Plug Fans (Centrifugal Ventilators)
295-41200 CFM



Larger Capacities Models are available on Demand

Indigenous Development for Inter-Services

ASM 500-S

For Robust Operating conditions (50HP Semi Hermetic Reciprocating Compressors)

Especially designed for fighter air crafts of PAF.



...and the spark ignites at Sabro

Indigenous Make For Inter Services

Sabro (ECU)
Precision environment control unit

Trolley Mounted
Mobile AC
For PAF



Ground Air-conditioning
Of Falcon fighter jet



Especially Designed
For Radar System Of PAF

Trolley Mounted
Mobile AC
For Pak Navy



Customized Solutions



Available with Environment Friendly
Refrigerant (R-407 C/410 A) + DC INVERTER



Larger Capacities Models are available on Demand

BMS Air Conditioning

A Building Management System (BMS) is a central computerized system for managing and operating systems within a building. A BMS usually incorporates controls for air conditioning, for energy management & maintenance systems.

A BMS is an essential tool in tuning the operation of any building and just like a well-tuned car, well-tuned building consistently runs more efficiently, BMS generally provides better performance. This ensures well that operating costs are minimized and occupants are more comfortable.

To manage energy use, it can monitor various parameters in the building such as temperature control, humidity and energy use and occupancy pattern. By doing so services such as air-conditioning, ventilation and heating, lift services, hot water systems and lighting are able to be controlled in ways that minimize energy use while optimizing comfort and function.



TECHNICAL SPECIFICATIONS

ASC Model Series

Air Cooled Self Contained Package ACs

MODEL	COMP. HP	COMPRESSOR TYPE	AIR FLOW RATE CFM	COOLING/HEATING CAPACITY	
				BTU/HR	KCAL/HR
ASC 040-S	1x3.75	Hermetic Scroll	1200	39400/40000	9935/10080
ASC 050-S	1x5.0	Hermetic Scroll	1500	51000/51500	12860/12986
ASC 060-S	1x6.0	Hermetic Scroll	1800	60500/61000	15246/15372
ASC 080-S	1x8.0	Hermetic Scroll	2400	79500/80250	20034/20223
ASC 080-D	2x3.75	Hermetic Scroll	2200	78800/80000	19858/20160
ASC 100-D	2x5.0	Hermetic Scroll	3000	102000/103000	25704/25956
ASC 120-D	2x6.0	Hermetic Scroll	3600	121000/121500	30492/30618
ASC 160-S	1x16	Hermetic Scroll	4800	155000/156200	39060/39363
ASC 160-D	2x8.0	Hermetic Scroll	4800	159000/159705	40068/40246
ASC 200-D	2x10	Hermetic Scroll	6000	212000/212700	53424/53600
ASC 240-D	2x12	Hermetic Scroll	7000	240000/241000	60480/60732
ASC 320-D	2x16	Hermetic Scroll	9000	310000/312400	78120/78725
ASC 370-D	2+16	Hermetic Scroll	10500	359000/365000	90468/91980
ASC 420-D	2x21	Hermetic Scroll	11500	408000/415000	102816/104580
ASC 480-T	3x16	Hermetic Scroll	13000	465000/NA	117180/NA
ASC 500-D	2x25	Hermetic Scroll	14500	506000/508000	127512/128016

The capacities are based on evaporator entering air temp at 80°F db(26.6°C), 67°F wb(19.5°C) & condenser entering air temp at 95°F db(35°C).
Due to continuous improvement in our products, specs may change without notice.

Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

ASU Model Series

Air Cooled Split Package ACs

MODEL	COMP. HP	COMPRESSOR TYPE	AIR FLOW RATE CFM	COOLING/HEATING CAPACITY	
				BTU/HR	KCAL/HR
ASU 040-S	1x3.75	Hermetic Scroll	1200	39400/40000	9935/10080
ASU 050-S	1x5.0	Hermetic Scroll	1500	51000/51500	12860/12986
ASU 060-S	1x6.0	Hermetic Scroll	1800	60500/61000	15246/15372
ASU 080-S	1x8.0	Hermetic Scroll	2400	79500/80250	20034/20223
ASU 080-D	2x3.75	Hermetic Scroll	2200	78800/80000	19858/20160
ASU 100-D	2x5.0	Hermetic Scroll	3000	102000/103000	25704/25956
ASU 120-D	2x6.0	Hermetic Scroll	3600	121000/121500	30492/30618
ASU 160-S	1x16	Hermetic Scroll	4800	155000/156200	39060/39363
ASU 160-D	2x8.0	Hermetic Scroll	4800	159000/159705	40068/40246
ASU 200-D	2x10	Hermetic Scroll	6000	212000/212700	53424/53600
ASU 240-D	2x12	Hermetic Scroll	7000	240000/241000	60480/60732
ASU 320-D	2x16	Hermetic Scroll	9000	310000/312400	78120/78725
ASU 370-D	21+16	Hermetic Scroll	10500	359000/365000	90468/91980
ASU 420-D	2x21	Hermetic Scroll	11500	408000/415000	102816/104580
ASU 480-T	3x16	Hermetic Scroll	13000	465000/NA	117180/NA
ASU 500 D	2x25	Hermetic Scroll	14500	506000/508000	127512/128016

The capacities are based on evaporator entering air temp at 80°F db(26.6°C), 67°F wb(19.5°C) & condenser entering air temp at 95°F db(35°C).
Due to continuous improvement in our products, specs may change without notice.

Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

LUCRE Model Series

Precision Cool/Heat ACs

MODEL	COMP. HP	COMPRESSOR TYPE	AIR FLOW RATE CFM	COOLING/HEATING CAPACITY BTU/HR/KW	KCAL/HR/KW
APD 100-D	2x5.0	Hermetic Scroll	4800	102023/6.0	25727/6.0
APD 120-D	2x6.0	Hermetic Scroll	5000	112635/8.0	28403/8.0
APD 150-D	2x7.5	Hermetic Scroll	6900	148496/10.0	37446/10.0
APD 200-D	2x10	Hermetic Scroll	10260	217797/14.0	54922/14.0
APD 300-D	2x15	Hermetic Scroll	12400	288562/18.0	72766/18.0

Specifications are based on, room temp at 24°C db(75°F), RH 50%,
outside temp at 35°C db(95°F).

Dimensions are subject to change without prior notice.

ARC Model Series

Split Evaporator with Remote Condenser

MODEL	COMP. HP	COMPRESSOR TYPE	AIR FLOW RATE CFM	COOLING/HEATING CAPACITY BTU/HR	KCAL/HR
ARC 040-S	1x3.75	Hermetic Scroll	1200	39400/40000	9935/10080
ARC 050-S	1x5.0	Hermetic Scroll	1500	51000/51500	12860/12986
ARC 060-S	1x6.0	Hermetic Scroll	1800	60500/61000	15246/15372
ARC 080-S	1x8.0	Hermetic Scroll	2400	79500/80250	20034/20223
ARC 080-D	2x3.75	Hermetic Scroll	2200	78800/80000	19858/20160
ARC 100-D	2x5.0	Hermetic Scroll	3000	102000/103000	25704/25956
ARC 120-D	2x6.0	Hermetic Scroll	3600	121000/121500	30492/30618
ARC 160-S	1x16	Hermetic Scroll	4800	155000/156200	39060/39363
ARC 160-D	2x8.0	Hermetic Scroll	4800	159000/159705	40068/40246
ARC 200-D	2x10	Hermetic Scroll	6000	212000/212700	53424/53600
ARC 240-D	2x12	Hermetic Scroll	7000	240000/241000	60480/60732
ARC 320-D	2x16	Hermetic Scroll	9000	310000/312400	78120/78725
ARC 370-D	2x16	Hermetic Scroll	10500	359000/365000	90468/91980
ARC 420-D	2x21	Hermetic Scroll	11500	408000/415000	102816/104580
ARC 480-T	3x16	Hermetic Scroll	13000	465000/NA	117180/NA
ARC 500-D	2x25	Hermetic Scroll	14500	506000/508000	127512/128016

The capacities are based on evaporator entering air temp at 80°F db(26.6°C),
67°F wb(19.5°C) & condenser entering air temp at 95°F db(35°C).

Due to continuous improvement in our products, specs may change without notice.

Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

WCP Model Series

Water Cooled Package ACs

MODEL	COMP. HP	COMPRESSOR TYPE	AIR FLOW RATE CFM	COOLING CAPACITY	
				BTU/HR	KCAL/HR
WCP 040-S	1x3.75	Hermetic Scroll	1200	39500	9961
WCP 050-S	1x5.0	Hermetic Scroll	1500	52525	13245
WCP 060-S	1x6.0	Hermetic Scroll	1800	61875	15603
WCP 080-S	1x8.0	Hermetic Scroll	2400	85250	21497
WCP 080-D	2x3.75	Hermetic Scroll	2300	79000	19921
WCP 100-D	2x5.0	Hermetic Scroll	3000	105050	26490
WCP 120-D	2x6.0	Hermetic Scroll	3600	123750	31205
WCP 160-S	1x16	Hermetic Scroll	4800	166500	41985
WCP 160-D	2x8.0	Hermetic Scroll	4900	170500	42994
WCP 200-D	2x10	Hermetic Scroll	6500	225500	56863
WCP 240-D	2x12	Hermetic Scroll	7500	258500	65184
WCP 320-D	2x16	Hermetic Scroll	9500	333000	83971
WCP 370-D	2+16	Hermetic Scroll	11000	383000	96579
WCP 420-D	2x21	Hermetic Scroll	12500	433000	109187
WCP 480-T	3x16	Hermetic Scroll	14500	499500	125956
WCP 500-D	2x25	Hermetic Scroll	15000	510000	128604

The capacities are based on evaporator entering air temp at 80°F db(26.6°C), 67°F wb(19.5°C) & condenser water entering temp at 85°F db(29.4°C).

Due to continuous improvement in our products, specs may change without notice.

Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

AWC Model Series

Air Cooled Package Chillers

MODEL	COMP. HP	COMPRESSOR TYPE	WATER FLOW RATE (US GPM)	COOLING CAPACITY	
				BTU/HR	KCAL/HR
AWC 040-S	1x3 .75	Hermetic Scroll	6.5	32500	8195
AWC 050-S	1x5 .0	Hermetic Scroll	9.00	45000	11347
AWC 060-S	1x6 .0	Hermetic Scroll	10.20	51000	12860
AWC 080-D	2x3 .75	Hermetic Scroll	13.00	65000	16391
AWC 100-D	2x5 .0	Hermetic Scroll	18.00	90000	22695
AWC 120-D	2x6 .0	Hermetic Scroll	20.40	102000	25721
AWC 160-S	1x16	Hermetic Scroll	26.00	130000	32781
AWC 160-D	2x8.0	Hermetic Scroll	26.20	131000	33034
AWC 200-D	2x10	Hermetic Scroll	35.92	179600	45289
AWC 200-Q	4x5.0	Hermetic Scroll	36.00	180000	45390
AWC 240-Q	4x6.0	Hermetic Scroll	40.80	204000	51442
AWC 240-D	2x12	Hermetic Scroll	40.90	204500	51568
AWC 260-D	16+10	Hermetic Scroll	43.96	219800	55426
AWC 320-D	2x16	Hermetic Scroll	52.00	260000	65563
AWC 370-D	21+16	Hermetic Scroll	60.42	302100	76179
AWC 420-D	2x21	Hermetic Scroll	70.00	350000	88258
AWC 500-D	2x25	Hermetic Scroll	81.66	408300	102959
AWC 640-D	2x32	Hermetic Scroll	106.75	533750	134593
AWC 700-D	2x35	S.H.Reciprocating	108.00	540000	136169
AWC 800-D	2x40	S.H.Reciprocating	118.00	590000	148777
AWC 1050-T	3x35	S.H.Reciprocating	162.00	810000	204253
AWC 1200-T	3x40	S.H.Reciprocating	177.00	885000	223165
AWC 1280-Q	4x32	Hermetic Scroll	213.50	1067500	269185
AWC 1400-Q	4x35	S.H.Reciprocating	216.00	1080000	272337
AWC 1600-Q	4x40	S.H.Reciprocating	236.00	1180000	297554
AWC 1920-H	6x32	Hermetic Scroll	320.25	1601250	403778
AWC 2100-H	6x35	S.H.Reciprocating	324.00	1620000	408506
AWC 2400-H	6x40	S.H.Reciprocating	354.00	1770000	446331

The capacities are based on 55°F(12.4°C) entering water temperature and 45°F(7.2°C) leaving water temp. from chiller & air entering temp. at condenser 95°F(35°C).
Due to continuous improvement in our products, specs may change without notice.

Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

ACS Model Series

Air Cooled Screw Chillers(single compressor)

Model Number (ACS)		100-S	135-S	175-S	200-S	220-S	250-S	300-S	330-S	
Nominal cooling capacity	Tons(Refrigeration)	28.4	38.1	49.3	57.4	62.8	71.4	84.2	94.4	
	KW	100	134	173.2	202	221	251	296	332	
	kcal/hx1000	85.9	115.2	150	174.5	189	216	255	285.5	
Power input	KW	30.0	40.3	50.0	58.2	63.8	72.8	85.5	95.5	
Rated current	Amps.	53.5	71.0	86	100.0	109.3	124.0	144.0	162.0	
Power supply	Voltage	380-415-3-50Hz								
Energy efficiency ratio	EER (COP)	11.4 (3.33)	11.3 (3.32)	11.8 (3.46)	11.8 (3.46)	11.8 (3.46)	11.7 (3.43)	11.8 (3.46)	11.9 (3.49)	
Capacity steps	%	25-50-75-100 OR step less as optional								
Compressor	Type	Semi-hermetic twin screw								
	Quantity	One	One	One	One	One	One	One	One	
	Starting Method	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	
	Rated speed (RPM)	2950	2950	2950	2950	2950	2950	2950	2950	
Refrigerant		134a	134a	134a	134a	134a	134a	134a	134a	
Refrigerant Charged(Kg)		30	40	51	60	65	75	88	98	
No. of refrigerant circuit		One	One	One	One	One	One	One	One	
Refrigerant control		Orifice /electronic expansion valve								
Evaporator (cooler)	Type	Shell and Tube								
	Water flow rate	USGPM	68	91.4	118	138	151	171	202	227
		m ³ /h	36.2	40.3	43.8	46.3	50.2	53.8	59	62.3
	Water pressure drop	KPa/feet	24/8	28/9.4	33/11	39/13.	42/14	44/15	48/16	51/17
	Water side working pressure	MPa/PSI	1/145	1/145	1/145	1/145	1/145	1/145	1/145	1/145
Water connection	mm Inch	DN63 2.5	DN76 3	DN76 3	DN102 4	DN102 4	DN102 4	DN125 5	DN125 5	
Condenser	Type	High efficiency Air cooled inner grooved copper and aluminum fins								
	Fan type	Propeller type direct driven								
	Fan quantity	04	04	08	08	08	12	12	12	
	Fan motor	Totally enclosed, F class insulation, 6pole, IP55								
Dimensions (mm)	height	2069	2069	2218	2333	2440	2440	2540	2540	
	width	2438	2438	3200	3200	3200	3310	3400	3400	
	depth	2286	2286	2286	2286	2286	2286	2286	2286	
Operating weight (approx.)	Kg	2000	2150	2400	2550	2700	3100	3850	4580	
Protection devices	High pressure cut out, low pressure cut out, power phase protection, anti freeze protection, frequent start protection, over current protection, over heat protection Comp., water flow protection, reverse phase protection,									
Operating limits	Leaving Chilled water temp.	5°C-15°C (41°F – 60.5°F)								
	Entering condenser air temp.	20°C-54°C (68°F – 129.2°F)								

Specifications are based on standard conditions,
 Entering/leaving chilled water 12.7°C/7.2°C(55°F/45°F)
 Entering condenser air 95°C(35°F)
 Fouling factor 0.0001 Btu/hr/S qft/°F
 Specifications are subject to change keeping in view the improvement in product.

Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

PRODUCT SPECIFICATIONS

ACS Model Series

Air Cooled Screw Chillers(double compressor)

Model Number ACS		365-D	400-D	464-D	500-D	540-D	590-D	665-D	765-D	
Nominal cooling capacity	Tons	103.7	114.9	131.8	143.0	153.9	168.4	188.8	217.6	
	KW	364.8	404	463.5	502.8	541	592	664	765	
	kcal/hx1000	314	347	399	432	465	509	571	658	
Power input	KW	53+53	59+59	67+67	73+73	78+78	85+85	95+95	110+110	
Rated current	Amps.	93+93	99+99	117+117	123+123	134+134	144+144	162+162	184+184	
Power supply	Voltage	380-415-3-50Hz								
Energy efficiency ratio	EER (COP)	11.7 (3.44)	11.7 (3.42)	11.8 (3.45)	11.8 (3.45)	11.8 (3.46)	11.9 (3.48)	11.9 (3.49)	11.9 (3.49)	
Capacity steps	%	25-50-75-100 OR step less as optional								
Compressor	Type	Semi-hermetic twin screw								
	Quantity	Two	Two	Two	Two	Two	Two	Two	Two	
	Starting Method	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	
	Rated speed (RPM)	2950	2950	2950	2950	2950	2950	2950	2950	
Refrigerant		134a	134a	134a	134a	134a	134a	134a	134a	
Refrigerant Charged (each)	Kg	55+55	59+59	68+68	74+74	80+80	86+86	96+96	112+112	
No. of refrigerant circuit		Two	Two	Two	Two	Two	Two	Two	Two	
Refrigerant control		Orifice / electronic expansion valve								
Evaporator (cooler)	Type	Shell and Tube								
	Water flow rate	USGPM	249	276	316	343	369	404	453	522
		m ³ /h	56.5	62.7	71.8	77.9	83.8	91.7	103	118.5
	Water pressure drop	KPa/feet	51/17	51/17	54/18	54/18.	57/19	57/19	60/20	63/21
	Water side working pressure	MPa/PSI	1/145	1/145	1/145	1/145	1/145	1/145	1/145	1/145
	Water connection	mm	DN125	DN125	DN125	DN150	DN150	DN150	DN150	DN150
Inch		5	5	5	6	6	6	6	6	
Condenser	Type	High efficiency Air cooled inner grooved copper and aluminum fins								
	Fan type	Propeller type direct driven								
	Fan quantity	15	18	21	21	21	21	27	27	
	Fan motor	Totally enclosed, F class insulation, 6pole, IP55								
Dimensions (mm)	height	2590	2590	2590	2590	2590	2590	2590	2590	
	width	4190	4370	4980	4980	5335	5335	6300	6300	
	depth	2286	2286	2286	2286	2286	2286	2286	2286	
Operating weight (opp)	Kg	4450	4800	5200	5750	6400	6650	7000	7500	
Protection devices	High pressure cut out, low pressure cut out, power phase protection, anti-freeze protection, frequent start protection, over current protection, over heat protection Comp., water flow protection, reverse phase protection,									
Operating limits	Leaving Chilled water temp.	5°C-15°C (41°F – 60.5°F)								
	Entering condenser air temp.	20°C-54°C (68°F – 129.2°F)								

Specifications are based on standard conditions,
 Entering/leaving chilled water 12.7°C/7.2°C(55°F/45°F)
 Entering condenser air 95°C(35°F)
 Fouling factor 0.0001 Btu/hr/S qft/°F
 Specifications are subject to change keeping in view the improvement in product.

Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

WWC Model Series

Water Cooled Package Chillers

MODEL	COMP. HP	COMPRESSOR TYPE	WATER FLOW RATE (US GPM)	COOLING CAPACITY	
				BTU/HR	KCAL/HR
WWC 040-S	1x3 .75	Hermetic Scroll	7.24	36179	9123
WWC 050-S	1x5 .0	Hermetic Scroll	9.81	49050	12369
WWC 060-S	1x6 .0	Hermetic Scroll	11.36	56774	14316
WWC 080-D	2x3 .75	Hermetic Scroll	14.48	72358	18246
WWC 100-D	2x5 .0	Hermetic Scroll	19.62	98100	24737
WWC 120-D	2x6 .0	Hermetic Scroll	22.72	113548	28633
WWC 160-S	1x16	Hermetic Scroll	28.94	144717	36492
WWC 160-D	2x8.0	Hermetic Scroll	28.90	144500	36438
WWC 200-D	2x10	Hermetic Scroll	39.10	195500	49298
WWC 200-Q	4x5 .0	Hermetic Scroll	39.24	196200	49475
WWC 240-Q	4x6.0	Hermetic Scroll	45.42	227096	57265
WWC 240-D	2x12	Hermetic Scroll	45.53	227651	57405
WWC 260-D	16+10	Hermetic Scroll	48.49	242467	61142
WWC 320-D	2x16	Hermetic Scroll	57.89	289434	72985
WWC 370-D	21+16	Hermetic Scroll	66.44	332200	83769
WWC 420-D	2x21	Hermetic Scroll	74.99	374966	94553
WWC 500-D	2x25	Hermetic Scroll	89.10	445524	112345
WWC 640-D	2x32	Hermetic Scroll	117.04	585176	147560
WWC 700-D	2x35	S.H. Reciprocating	124.35	621750	156783
WWC 800-D	2x40	S.H. Reciprocating	140.83	704125	177555
WWC 1050-T	3x35	S.H. Reciprocating	186.53	932625	235175
WWC 1200-T	3x40	S.H. Reciprocating	211.24	1056188	266333
WWC 1280-Q	4x32	Hermetic Scroll	237.67	1188352	299660
WWC 1400-Q	4x35	S.H. Reciprocating	248.70	1243500	313566
WWC 1600-Q	4x40	S.H. Reciprocating	281.65	1408250	355110
WWC 1920-H	6x32	Hermetic Scroll	351.11	1755528	442681
WWC 2100-H	6x35	S.H. Reciprocating	373.05	1865250	470349
WWC 2400-H	6x40	S.H. Reciprocating	422.48	2112375	532665

The capacities are based on 55°F(12.4°C) entering water temperature and 45°F(7.2°C) leaving water temp. from chiller & water entering/leaving temp. at condenser 85°F/95°F(29.4°C/35.0°C).
Due to continuous improvement in our products, specs may change without notice.

Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

PRODUCT SPECIFICATIONS

WFSC Model Series

Water Cooled Screw Chillers(single compressor)

Model Number		WFSC-234 S	WFSC-260 S	WFSC-280 S	WFSC-298 S	WFSC-323 S	WFSC-348 S	WFSC-380 S	WFSC-406 S	
Nominal cooling capacity	Tons	66.5	74	80.4	85	92	98.6	108	115	
	KW	234	260	283	298	323	346.7	380.7	405.7	
	kCal/h x1000	201	224	243	257	278	211	326	348	
Power input	KW	44.5	48.1	53.8	57.8	60.5	65.8	71.0	73.1	
Rated current	Amps.	79.9	85.2	92.2	98.1	105	112.4	121.2	125	
Power supply	Voltage	380-415-3-50Hz								
Energy efficiency ratio	EER (COP)	17.9 (5.25)	18.5 (5.40)	17.9 (5.26)	17.64 (5.15)	18.24 (5.33)	18 (5.26)	18.25 (5.36)	19 (5.54)	
Capacity steps	%	25-50-75-100 OR step less as optional								
Compressor	Type	Semi-hermetic twin screw								
	Quantity	One	One	One	One	One	One	One	One	
	Starting Method	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	
	Rated speed (RPM)	2950	2950	2950	2950	2950	2950	2950	2950	
Refrigerant		134a	134a	134a	134a	134a	134a	134a	134a	
Refrigerant Charged										
No. of refrigerant circuit		One	One	One	One	One	One	One	One	
Refrigerant control		Orifice + electronic expansion valve								
Evaporator (cooler)	Type	Shell and Tube Flooded								
	Water passes	2	2	2	2	2	2	2	2	
	Water flow rate	USGPM	159.6	177.6	193	204	221	237	259	276
		m ³ /h	36.2	40.3	43.8	46.3	50.2	53.8	59	62.3
	Water pressure drop	KPa/feet	34/11	36/12	38/13	41/14	43/14	45/15	45/15	46/15
	Water side working pressure	MPa/PSI		1/145	1/145	1/145	1/145	1/145	1/145	1/145
	Water connection	mm	DN76	DN76	DN102	DN102	DN102	DN102	DN102	DN102
Inch		3	3	4	4	4	4	4	4	
Condenser	Type	Shell and tube								
	Water passes	2	2	2	2	2	2	2	2	
	Water flow rate	USGPM	199.5	222	241.2	255	276	296	324	345
		m ³ /h	45.3	50.42	55	58	62.7	67.2	73.6	78
	Water pressure drop	KPa/feet	36/12	38/13	40/13	43/14	44/14	47/16	48/16	48/16
	Water side working pressure	MPa/Psi	1/145	1/145	1/145	1/145	1/145	1/145	1/145	1/145
	Water connection	mm	DN76	DN76	DN102	DN102	DN102	DN102	DN102	DN102
Inch		3	3	4	4	4	4	4	4	
Dimensions (mm)	Length	3450	3450	3450	3450	3650	3640	3640	3640	
	width	1500	1500	1500	1500	1550	1550	1550	1600	
	height	1600	1600	1600	1600	1650	1650	1650	1700	
Operating weight	Kg	2800	3000	3200	3450	3450	3450	3550	3550	
Protection devices	High pressure cut out, low pressure cut out, power phase protection, anti freeze protection, frequent start protection, over current protection, over heat protection Comp., water flow protection, reverse phase protection,									
Operating limits	Leaving Chilled water temp.	5°C-15°C (41°F – 59°F)								
	Entering condenser water temp.	20°C-35°C (68°F – 95°F)								

Specifications are based on standard conditions,

Entering/leaving chilled water 12.7°C/7.2°C(55°F/45°F)

Entering/leaving condenser water 30°C/35°C(85°F/95°F)

Fouling factor 0.0005 Btu/hr/Sqft/°F

Specifications are subject to change keeping in view the improvement in product.

Available with Environment Friendly Refrigerant + DC Inverter
Larger Capacities Models are available on Demand

PRODUCT SPECIFICATIONS

WFSC Model Series

Water Cooled Screw Chillers(single compressor)

Model Number		WFSC-430 S	WFSC-490 S	WFSC-545 S	WFSC-585 S	WFSC-684 S	WFSC-785 S	WFSC-860 S	
Nominal cooling capacity	Tons	121	139	155	166	194.5	223	245	
	KW	427.3	490.3	544	585	684	783	862	
	kCal/h x1000	366	420	469	502	588	674	741	
Power input	KW	79	90.5	99.5	107.4	122	142	154.5	
Rated current	Amps.	136.4	157	172	186.4	210	251	270	
Power supply	Voltage	380-415-3-50Hz							
Energy efficiency ratio	EER (COP)	18.4 (5.4)	18.4 (5.41)	18.7 (5.46)	18.54 (5.45)	19.13 (5.6)	19 (5.5)	19 (5.6)	
Capacity steps	%	25-50-75-100 OR step less as optional							
Compressor	Type	Semi-hermetic twin screw							
	Quantity	One	One	One	One	One	One	One	
	Starting Method	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	y-Δ	
	Rated speed (RPM)	2950	2950	2950	2950	2950	2950	2950	
Refrigerant		134a	134a	134a	134a	134a	134a	134a	
Refrigerant Charged									
No. of refrigerant circuit		One	One	One	One	One	One	One	
Refrigerant control		Orifice + electronic expansion valve							
Evaporator (cooler)	Type	Shell and Tube Flooded							
	Water passes	2	2	2	2	2	2	2	
	Water flow rate	USGPM	290.4	333.6	372	398.4	467	535	588
		m ³ /h	66	76	84.5	89.3	106	121.5	133.5
	Water pressure drop	KPa/feet	50/17	53/18	56/19	58/19	60/20	63/21	65/22
	Water side working pressure	MPa/Psi	1/145	1/145	1/145	1/145	1/145	1/145	1/145
	Water connection	mm	DN125	DN125	DN125	DN150	DN150	DN150	DN150
Inch		5	5	5	6	6	6	6	
Condenser	Type	Shell and tube							
	Water passes	2	2	2	2	2	2	2	
	Water flow rate	USGPM	363	417	465	498	583.5	669	735
		m ³ /h	82.4	95	105.6	113	132.5	152	167
	Water pressure drop	KPa/feet	52/18	55/18	58/19	59/20	60/20	62/21	66/22
	Water side working pressure	MPa/Psi	1/145	1/145	1/145	1/145	1/145	1/145	1/145
	Water connection	mm	DN125	DN125	DN125	DN150	DN150	DN150	DN150
Inch		5	5	5	6	6	6	6	
Dimensions (mm)	Length	3640	3640	3640	3640	3640	3640	3640	
	width	1600	1600	1700	1700	1800	1800	1850	
	height	1850	1850	1900	2000	2200	2200	2200	
Operating weight	Kg	4000	4800	5500	5900	6200	6500	7000	
Protection devices	High pressure cut out, low pressure cut out, power phase protection, anti freeze protection, frequent start protection, over current protection, over heat protection Comp., water flow protection, reverse phase protection,								
Operating limits	Leaving Chilled water temp.	5°C-15°C (41°F – 59°F)							
	Entering condenser water temp.	20°C-35°C (68°F – 95°F)							

Specifications are based on standard conditions,

Entering/leaving chilled water 12.7°C/7.2°C(55°F/45°F)

Entering/leaving condenser water 30°C/35°C(85°F/95°F)

Fouling factor 0.0005 Btu/hr/Sqft/°F

Specifications are subject to change keeping in view the improvement in product.

Available with Environment Friendly Refrigerant + DC Inverter
Larger Capacities Models are available on Demand

PRODUCT SPECIFICATIONS

WFSC Model Series

Water Cooled Screw Chillers(double compressor)

Model Number (WFSC)		850 D	980 D	1088 D	1170 D	1370 D	1570 D	1725 D	
Nominal cooling capacity	Tons	243	278	309	332	389	445	490	
	KW	854	980	1087	1169	1368	1566	1724	
	KCal/hx1000	735	841	934	1004	1177	1346	1482	
Power input (each comp.)	KW	79 +79	90 + 90	99 + 99	107+107	122+122	142+142	155+155	
Rated current (each)	Amps.	136+136	157+157	172+172	187+187	211+211	252 +252	270+270	
Power supply	Voltage	380-415-3-50Hz							
Energy efficiency ratio	EER	18.4	18.5	18.7	18.6	19.1	18.8	18.9	
	COP	5.4	5.4	5.5	5.5	5.6	5.5	5.6	
Capacity control	%	25-50-75-100% OR step less as optional							
Compressor	Type	Semi-hermetic twin screw							
	Quantity	two							
	Starting Method	Y-Δ							
	Rated speed	2950RPM							
Refrigerant		134a							
Refrigerant Charged		200+200	210+210	220+220	230+230	240+240	250+250	260+260	
No. of refrigerant circuit		Two							
Refrigerant control		Orifice + electronic expansion valve							
Evaporator (cooler)	Type	Shell and tube flooded							
	Water passes	2							
	Water flow rate	USGPM	583	667	742	797	943	1068	1176
		m ³ /h	134.4	151.5	168.5	181	214	242.5	267
	Water pre. drop	Kpa/feet	55/18	58/19	60/20	60/20	65/22	70/23.5	72/24
	Water side working Pre.	Mpa/PSI	1.0MPa/145						
	Water connection	MM	DN150	DN150	DN200	DN200	DN200	DN200	DN 200
Inch		6	6	8	8	8	8	8	
Condenser	Type	Shell and tube							
	Water passes	2	2	2	2	2	2	2	
	Water flow rate	USGPM	729	834	927	996	1167	1335	1470
		m ³ /h	165.6	189.4	210.5	226	265	303	334
	Water pre. drop	Kpa/feet	58/19	62/21	65/22	70/23	70/23	74/25	80/26
	Water side working pre.	Mpa/PSI	1.0MPa/145						
	Water connection	MM	DN150	DN150	DN200	DN200	DN200	DN200	DN 200
Inch		6	6	8	8	8	8	8	
Dimensions MM (inches)	Length	4600 (181)			4650(183)				
	width	1750 (69)			1800 (72)				
	height	2000 (79)			2210 (87)				
Operating weight APP.	Kg	6500	6850	7200	7400	7800	8500	9200	
Protection devices	High pressure cut out, low pressure cut out, power phase protection, anti freeze protection, frequent start protection, over current protection, over heat protection Comp., water flow protection, reverse phase protection,								
Operating limits	Leaving Chilled water temp.	5°C-15°C (41°F – 59°F)							
	Entering condenser water temp.	20°C-35°C (68°F – 95°F)							

Specifications are based on standard conditions,

Entering/leaving chilled water 12.7°C/7.2°C(55°F/45°F)

Entering/leaving condenser water 30°C/35°C(85°F/95°F)

Fouling factor 0.0005 Btu/hr/Sqft/°F

Specifications are subject to change keeping in view the improvement in product.

Available with Environment Friendly Refrigerant + DC Inverter
Larger Capacities Models are available on Demand

PRODUCT SPECIFICATIONS

WFSC Model Series

Water Cooled inverter Screw Chillers(single compressor)

Model Number (WFSC)		220 SV	260 SV	304 SV	370 SV	420 SV	500 SV	556 SV	760 SV	
Nominal cooling capacity @65HZ	Tons	63.4	74.8	86.4	104.8	119.5	140.8	158.0	216	
	KW	223	263	304	368.6	420	495	556.0	760	
	KCal/hx1000	192	226	261	317	361	426	478	653	
Power input	KW	45	51.2	59.1	71.0	80.4	94	104	142.4	
Rated current	Amps.	76	87	101	122	137.2	160	179	242.5	
Power supply	Voltage	380-415-3-50Hz								
Energy efficiency ratio	EER	16.98	17.5	17.5	17.7	17.8	17.97	18.2	18.2	
	COP	4.9	5.13	5.14	5.19	5.22	5.26	5.34	5.34	
Capacity control		(Modulating) variable speed								
Compressor	Type	Semi-hermetic twin screw								
	Quantity	one								
	Starting Method	By inverter, speed up 0HZ to 65HZ								
	Rated speed @ 65HZ	3840RPM								
Refrigerant		134a								
Refrigerant Charged		160	175	180	190	200	200	212	220	
No. of refrigerant circuit		one								
Refrigerant control		Orifice + electronic expansion valve								
Evaporator (cooler)	Type	Shell and tube flooded								
	Water passes	2								
	Water flow rate	USGPM	152	179.5	207	252	287	338	380	518
		m ³ /h	43.5	40.8	47.0	57.2	65.2	76.8	86.3	117.6
	Water pre. drop	Kpa/feet	34/11	36/12	41/14	45/15	47/16	53/18	56 / 19	63/21
	Water side working Pre.	Mpa/PSI	1.0MPa/145							
	Water connection	MM	DN76	DN76	DN102	DN102	DN125	DN125	DN 125	DN150
Inch		3	3	4	4	5	5	5	6	
Condenser	Type	Shell and tube								
	Water passes	2	2	2	2	2	2	2	2	
	Water flow rate	USGPM	190	224	259	314	358	422	474	648
		m ³ /h	43.2	50.9	58.8	71.3	81.3	95.8	108	147
	Water pre. drop	Kpa/feet	36/12	38/13	43/14	48/16	48/16	55/18	60/20	62/21
	Water side working pre.	Mpa/PSI	1.0MPa/145							
	Water connection	MM	DN76	DN76	DN102	DN102	DN125	DN125	DN 125	DN150
Inch		3	3	4	4	4	5	5	6	
Dimensions MM (inches)	Length	3450 (136)			3640 (136)			3640 (136)		
	width	1500 (59)			1550 (61)			1700 (67)		
	height	1600 (63)			1650 (65)			2200 (87)		
Operating weight APP.	Kg	2800	3000	3500	3550	4000	4800	5500	6200	
Protection devices	High pressure cut out, low pressure cut out, power phase protection, anti freeze protection, frequent start protection, over current protection, over heat protection Comp., water flow protection, reverse phase protection,									
Operating limits	Leaving Chilled water temp.	5°C-15°C (41°F – 59°F)								
	Entering condenser water temp.	20°C-35°C (68°F – 95°F)								

Specifications are based on standard conditions,

Entering/leaving chilled water 12.7°C/7.2°C(55°F/45°F)

Entering/leaving condenser water 30°C/35°C(85°F/95°F)

Fouling factor 0.0005 Btu/hr/Sqft/°F

Specifications are subject to change keeping in view the improvement in product.

Larger Capacities Models are available on Demand

PRODUCT SPECIFICATIONS

WFSC Model Series

Water Cooled inverter Screw Chillers(double compressor)

Model Number (WFSC)		840 DV	915 DV	990 DV	1050 DV	1110 DV	1315 DV	1520 DV	
Nominal cooling capacity @65HZ	Tons	239	260	281	298	316	374	432	
	KW	840	915	990	1050	1110	1315	1520	
	KCal/hx1000	723	786	850	901	956	1131	1306	
Power input (each comp.)	KW	80 +80	80 + 94	94 + 94	94+ 104	104+104	104+142	142+142	
Rated current (each)	Amps.	137+137	137+160	160+160	160179	179+179	179 +243	243+243	
Power supply	Voltage	380-415-3-50Hz							
Energy efficiency ratio	EER	16.93	17.9	17.9	18.0	18.2	18.5	18.25	
	COP	5.2	5.25	5.25	5.3	5.33	5.43	5.35	
Capacity control		(Modulating) variable speed							
Compressor	Type	Semi-hermetic twin screw							
	Quantity	two							
	Starting Method	By inverter, speed up 0HZ to 65HZ							
	Rated speed @ 65HZ	3840RPM							
Refrigerant		134a							
Refrigerant Charged		200+200	200+210	210+210	210+215	215=215	215=220	220+220	
No. of refrigerant circuit		Two							
Refrigerant control		Orifice + electronic expansion valve							
Evaporator (cooler)	Type	Shell and tube flooded							
	Water passes		2						
	Water flow rate	USGPM	574	624	675	715	758	898	1037
		m ³ /h	130.4	142	153	162.3	172	204	236
	Water pre. drop	Kpa/feet	55/18	58/19	60/20	60/20	65/22	70/23.5	72 / 24
	Water side working Pre.	Mpa/PSI	1.0MPa/145						
	Water connection	MM	DN150	DN150	DN200	DN200	DN200	DN200	DN 200
Inch		6	6	8	8	8	8	8	
Condenser	Type	Shell and tube							
	Water passes		2	2	2	2	2	2	2
	Water flow rate	USGPM	717	780	843	894	948	1122	1296
		m ³ /h	163	177	191	203	215	255	294
	Water pre. drop	Kpa/feet	58/19	62/21	65/22	70/23	70/23	74/25	80/26
	Water side working pre.	Mpa/PSI	1.0MPa/145						
	Water connection	MM	DN150	DN150	DN200	DN200	DN200	DN200	DN 200
Inch		6	6	8	8	8	8	8	
Dimensions MM (inches)	Length	4600 (181)			4650(183)				
	width	1750 (69)			1800 (71)				
	height	2000 (79)			2210 (87)				
Operating weight APP.	Kg	6500	6850	7200	7400	7600	7900	8200	
Protection devices	High pressure cut out, low pressure cut out, power phase protection, anti freeze protection, frequent start protection, over current protection, over heat protection Comp., water flow protection, reverse phase protection,								
Operating limits	Leaving Chilled water temp.			5°C-15°C (41°F – 59°F)					
	Entering condenser water temp.			20°C-35°C (68°F – 95°F)					

Specifications are based on standard conditions,

Entering/leaving chilled water 12.7°C/7.2°C(55°F/45°F)

Entering/leaving condenser water 30°C/35°C(85°F/95°F)

Fouling factor 0.0005 Btu/hr/Sqft/°F

Specifications are subject to change keeping in view the improvement in product.

Larger Capacities Models are available on Demand

Refrigerated Dehumidifiers

DE HUMIDIFIER MODEL		DH-050-S	DH-100-S	DH-100-D	DH-200-S
Moisture Removing Capacity		48PINTS/Day	100PINTS/Day	100PINTS/Day	200PINTS/Day
(Dehumidifying Capacity)		23Liters/Day	47Liters/Day	47Liters/Day	94.50Liters/Day
Compressor	Type	Hermetic (Rotary)	Hermetic (Rotary)	Hermetic (Rotary)	Hermetic (Rotary)
	Quantity	1 No.	1 No.	2 No.	1 No.

Due to continuous improvement in our products, specs may change without notice.

Fan Coil Units

MODEL	AIR FLOW RATE (CFM)	WATER FLOW RATE (GPM)	CAPACITY COOLING BTU/HR (KCAL/HR)
FCU 300	300	1.8	9000 (2270)
FCU 400	400	2.4	12000 (3026)
FCU 600	600	3.6	18000 (4539)
FCU 800	800	4.8	24000 (6052)
FCU 1000	1000	6.0	30000 (7565)
FCU 1200	1200	7.2	36000 (9078)
FCU 1600	1600	9.6	48000 (12104)
FCU 2000	2000	12.0	60000 (15130)

Due to continuous improvement in our products, specs may change without notice.

Central Station AHUs

AHU MODEL	AIR FLOW RANGE (CFM)	NOMINAL AIR FLOW (CFM)
110A4, A6, B4, B6 (Forward Curved)	800~1600~Low&MedStaticPr.	900(A4&A6),1400(B4&B6)
112A4, A6, B4, B6, C4, C6 (F.C)	1500~3800~Low&MedStaticPr.	1800(A4&A6),2500(B4&B6),3500(C4&C6)
115A4, A6, B4, B6, C4, C6 (F.C)	4000~6500~Low&MedStaticPr.	4200(A4&A6),5400(B4&B6),6100(C4&C6)
118A4, A6, B4, B6 (F.C)	6500~8500~Low&MedStaticPr.	7000(A4&A6),7800(B4&B6)
122A4, A6, B4, B6 (F.C)	9500~13500~Low&MedStaticPr.	10500(A4&A6),12500(B4&B6)
125A4, A6, B4, B6 (F.C)	12000~16500~Low&MedStaticPr.	13500(A4&A6),15000(B4&B6)
110A4, A6, B4, B6 (Backward Inclined)	800~1600~HighStaticPr.	900(A4&A6),1400(B4&B6)
112A4, A6, B4, B6, C4, C6 (B.I)	1500~3800~HighStaticPr.	1800(A4&A6),2500(B4&B6),3500(C4&C6)
115A4, A6, B4, B6, C4, C6 (B.I)	4000~6500~HighStaticPr.	4200(A4&A6),5400(B4&B6),6100(C4&C6)
118A4, A6, B4, B6 (B.I)	6500~8500~HighStaticPr.	7000(A4&A6),7800(B4&B6)
122A4, A6, B4, B6 (B.I)	9500~13500~HighStaticPr.	10500(A4&A6),12500(B4&B6)

Due to continuous improvement in our products, specs may change without notice.

Available with Environment Friendly Refrigerant + DC Inverter

Larger Capacities Models are available on Demand

Desiccant Dehumidifiers

(100-1200 CFM)Process Air

Description		DHF 100	DHF200	DHF 400	DHF 600	DHF 900	DHF 1200
Process air							
Air flow rate	Lit/sec	47.2	94.4	189	283	424	566
(Standard)	M3/h	170	340	680	1020	1529	2038
	CFM	100	200	400	600	900	1200
Fan external	Pa	150	150	200	200	200	200
static pr. (ESP)	In H2O	0.6	0.6	0.8	0.8	0.8	0.8
Process fan motor power	KW	0.11	0.11	0.37	0.55	1.1	1.5
Motor winding insulation class		F	F	F	F	F	F
Reactivation air							
Air flow rate	Lit/sec	16	28	59	95	142	193
(Standard)	M3/h	56	102	212	340	510	695
	CFM	33	60	125	200	300	409
Fan external	Pa	100	100	150	150	150	150
Static pr. (ESP)	In H2O	0.4	0.4	0.6	0.6	0.6	0.6
Process fan motor power	KW	0.09	0.09	0.11	0.37	0.55	0.75
Motor winding insulation class		F	F	F	F	F	F
Reactivation heater							
Heater power	KW	1.9	3.5	7.5	12	16	22
Air temperature rise	°F (°C)	182(83)	184 (84)	189 (87)	189 (87)	189 (87)	184 (84)
Electrical data							
Total power	KW	2.11	3.71	8.0	12.94	17.7	24.2
Voltage supply		220-1-50HZ			380-415-3- 50-HZ		
Air filter class		Eu3 grade leak tight filter					
Dimensions	Height	500	500	500	550	580	600
(MM)	Width	914	965	1016	1040	1143	1219
	Depth	610	635	685	725	790	865
Weight	KG	47	58	80	110	165	182

Due to continuous improvement in our products, specs may change.

Up to 2500 CFM(Process air) are available.

With IMPROVED TECHNOLOGY of DESICCANT WHEEL.

Larger Capacities Models(Up to 12000CFM(Process Air)

Are Available On Demand

Air Curtains

(Standard 36", 48", 60" Width)

CATEGORY		SUPER THIN			STANDARD			DELUXE		
MODEL		FM-1209	FM-1212	FM-1215	FM-1509	FM-1512	FM-1515	FM-4012	FM-4015	
OPERATING VOLTAGE		220~ 240V -1 Phase -50 Hz								
POWER INPUT (Watts)		140	230	280	230	300	350	440	530	
Air Velocity At Discharge	H	(M/S)	11.1	11.1	11.1	12.8	12.8	12.8	15	15
		FPM	2185	2185	2185	2520	2520	2520	2953	2953
	L	(M/S)	8	8	8	10	10	10	16	16
		FPM	1575	1575	1575	1969	1969	1969	3150	3150
AIR VOLUME	H	CMH	1150	1750	2180	1512	2316	2820	1900	2300
		CFM	677	1030	1283	890	1363	1660	1118	1354
	L	CMH	900	1200	1500	1260	1930	2350	1500	1900
		CFM	530	706	883	742	1136	1383	883	1118
NOISE (d B(A))		<57	<58	<59	<65	<66	<66	<58	<61	
NET WEIGHT (Kg)		12	15	18	19.5	24	28	18	23	
DIMENSIONS Mm(Inches)	H	215(8.46)	215(8.46)	215(8.46)	240(9.45)	240(9.45)	240(9.45)	230(9)	230(9)	
	W	900(35.4 3)	1200(47.3)	1500(59)	900(35.43)	1200(47.3)	1500(59)	1200(47. 3)	1500(59)	
	D	180(7)	180(7)	180(7)	210(8.26)	210(8.26)	210(8.26)	215(8.46)	215(8.46)	
Air Velocity (M/S)		11.1			12.8			15		
Air Velocity At Different Distances	1 M	5.2			7.1			8.2		
	2 M	3.1			5.0			6.0		
	3 M	1.7			2.5			3.0		
	4 M	1.2			2.0			2.3		

Due to continuous improvement in our products, specs may change.

Larger Capacities Models are available on Demand

Cabinet Heater & Package Unit Heater (Specifications)

Model	CH 300-X(1,2,3)			CH 600-X(4,4.5,5,6)			CH 1000-X(8.4,10)		CH 1200-X(12)	
Electric Heater Details										
Electric voltage supply	220-240-1-50Hz									
Heater power in	1Kw	2Kw	3Kw	4Kw	4.5Kw	5Kw	6Kw	8.4Kw	10Kw	12Kw
Air flow	300 CFM			600 CFM			1000 CFM		1200 CFM	
Heater element type	Fin Type Resistance PTC Heater									
Current at 220V A	4.5	9.1	13.7	18.2	20.5A	22.7A	27.3A	38.6A	46A	55A
Current at 240V Am	4.9A	9.8A	14.7A	19.6A	22.4A	24.8	30.0A	42.5A	49A	60A
Heating capacity at 220V Btu/h	3380	6830	10245	13660	15370	17079	20498	28983	34540	41298
Heating capacity at 240V Btu/h	4013	8030	12045	16060	18350	20317	24573	34815	40136	49148
Thermostat t	Unit mounted electromechanical									
Safety Device	High temperature Cutout and Fuse									
Supply Air Fan / Mot or Details										
Fan type	Forward Curved Centrifugal									
Drive type	Direct Driven									
ESP	Free Discharge									
Fan motor type	3-Speed (PSC)									
Fan motor Qty	1	1	1	1	1	1	1	2	2	2
Motor watts X Q	100	10	10	120	12	120	125	125x2	125 x 2	125 x 2
Construction Details										
Construction	Galvanized steel sheet									
Outer finish	Electrostatic backed powder paint									
Unit dimension H x W x D (mm)	457x610x250			510x930x290			673x1829x290		673x1829x290	
Unit weight (Kg)	20	20	20	40	40	40	40	60	60	70

With Improved Technology of Energy Efficient Design

Cabinet Heater can be provided on other voltage supply.

Please contact factory for other requirement.

X with numbers Shows the heater KW. For example> CH300-X2, means Model CH300 with 2KW heater,

Keeping in view the improvement, specifications subject to change without notice.

Larger Capacities Models are available on Demand

MANUFACTURING FACILITIES

Technologies

CNC Machines & Tools

We are working on the following type of machines which have been converted to CNC.
(Computerized Numerically Controlled) machines:

- Machining Centers
- Milling Machines
- Lathe Machines
- Cutters and Benders
- Fin Presses
- Plastic Injection Molding Machines
- U-Bend Cutter



Molds & Dies


We have developed various plastic and metal molds and dies with finish of international standards, and have made dies for diverse applications.

Robotics

Our Research and Development team is working on Robotics as a joint technological venture with our subsidiary company NDT. We are looking for consumer robotics as our outcome.

We have the following machinery for mechanical field related needs

- Vertical Machining center 3000x1000x1000
- CNC milling 1500x1000x400
- CNC milling 700x500x300
- EDM
- CNC wire cut 2 no's
- Vertical Milling No-3 2 no's
- Horizontal milling No4
- Turret milling No-2 2 no's
- Surface grinder 250x600
- Surface grinder 300x600
- Surface grinder 2000x1000
- Planer
- Radial Drill
- Vertical column drill
- JP Dynamic Fan balancing machine
- Haco Omatic 212 RH CNC Punching
- Fanuc CNC-3 axis vertical machining Center





Manufacturing in the Digital Age

We use the power of the global market place to develop the highest quality product, industrial tools & machinery at the lowest possible prices, all while ensuring fast delivery.

This gives our company the edge by ensuring you have the product you need, when you need it-and more importantly allows you to use our product at an effective & affordable cost.

Research & Development Department

Sabro R&D department was established in **1986**. The sole purpose of establishing R & D Department was to develop the products which benefit our customers. By encouraging research activities, the quality of the products was improved further and the product lines were broadened. Sabro believes in quality and quality can only be achieved by continuous improvement. Every effort is directed towards making high quality products which are reliable, safe and user friendly.

At Sabro, Precision Test & Balance Lab engages in testing & balancing of HVAC Systems under supervision of professional engineers who are devoted, dedicated, determined & enthusiastic..

The R&D arm approaches these activities while keeping vigilant eyes on both customers' needs & what it takes to satisfy them.

Simply stated, our efforts to develop fundamental technologies are directed towards customer needs. **Sabro's R&D Department has two top priorities:**

- Researching and developing basic technologies that can be used to create future business opportunities.
- Researching and developing new technologies that can be utilized to further expand current business opportunities.

2016: Research and development of precision design draw-through floor standing units.

2017: Research and development of precision cabinets for solar based power generation system-erect.

2018: Research, development and production of **Energy Efficient De Humidifiers with Desiccant rotor technology..**

2019/20: Research and Development of energy efficient Air Cooled/Water Cooled Screw/Centrifugal Chillers..

2020/21: Research & Development of **Plasma Air Sterilizers against COVID-19..**

2021/22: Research & Development of **DC Inverter Commercial Systems..**

2022/23: Development of **DC 24V-AC Package unit for vehicle Air-conditioning..**

2022/23: Development of Direct-driven/Belt-driven **Plug Fans(Centrifugal Ventilators)..**

Manufacturing Facilities at 150,000 Sq. Feet Area

- The salient features of our manufacturing facility are;

Total manufacturing covered area of 150,000 Sq. feet, with highly competitive professional employees working in 30 different specialized departments. Our production capacity is 2500-3000 horse powers per day for;

- **Standardized**
- **Customized**
- **Specialized**
- **Domestic, Industrial and Commercial** units.



Right Solutions At Right Time

In a highly competitive environment besides innovative technology; right solution are needed at the right time to adapt to different situation.



Just Tell Us Your HVAC Need

WE'LL MAKE IT!

ANYTHING!

FROM BASIC AIR CONDITIONING

TO THE MOST COMPLEX CUSTOMIZED HVAC SOLUTIONS

YOU CAN STOP READING NOW, EVERYTHING CAN BE TAKEN CARE OF,

JUST TELL US WHAT YOU NEED US TO MAKE - WE'LL MAKE IT!



CNC Multi Tools Operation Set-Up



CNC Machining automates fabrication processes.



At Sabro, manufacturing facility is equipped with advanced division making and control techniques to optimize, integrate and automate material processing at every stage in the manufacturing process. This helps us in maximizing quality and efficiency while giving room for improvements without slowing down production. We make an effective use of our high profile technological machinery set-up.

Manufacturing & Testing Facilities

- CNC sheet punching and fins punching machines
- Documented Quality Management System
- R&D facilities
- Electronics Research and Development dept.
- Manufacturing facilities at 150,000 Sq. Ft area
- CNC Lathe Machines (Horizontal/Vertical)
- CNC Boring Machines
- CNC Jig Machines
- Specialized Tools
- Plastic Molding Machines
- Metal Dies
- Ammunition (Tear Gas Shell)



Industrial Machines Manufacturing

- CNC Lath M/C
- CNC Milling M/C
- Machining Centre
- Special kind of CNC M/Cs for customized machining
- Jigs and Fixtures with Combo of CNC M/Cs

Industrial Tool Making

- Injection Molding Tools/Molds
- Sheet Metal fabrication and Sheet Metal Tools & Dies
- Retrofitting of Old conventional M/Cs to convert into CNC M/Cs
- Manual M/Cs to Automated M/Cs

Manufacturing Capability-SPV & MRV-Defence

- Sabro is capable of manufacturing SPV(Special purpose vehicles) & MRV(Multi Role Vehicles) for Pak Defense.

Machining Services & Solutions

Machining

- Employing the latest technology in conventional and CNC machining,

We Offer

- Precision machining and manufacturing on job shop or production basis.

We Specialize In

- Turning, Boring, Drilling-Tapping, Milling,
- Surface, Shaping, Grinding, Assembly, Balancing

You Are Assured Of

- Manufacturing quality, guaranteed by in-process & final inspection.



Continuous Improvement

- We are continually upgrading the Machining equipment in order to better Serve our customers.

Comprehensive Manufacturing Scope

- We offer parts from partially machined to completely finished to the Customer requirements and satisfaction.

Molding

- This is our Total commitment

We serve your total molding needs to give you Unbeatable competitive advantage.

Experience in tool making and engineering capabilities of our people decided that today plastic injection molds & aluminum pressure die casting dies constitute the product line of the company.

- We are specialized in many fields such as:
 - Molds For Air-Conditioning Industry
 - Molds For Electronics
 - Defense Industry
 - Injection Molds
 - General Industry



Die Making

- Precision, Commitment, Excellence
- We build top quality dies for all types of industries that produce verity of products.
- We build press dies, samples, vinyl's, stripping tools, blanking tools, counter plates
- Full service from design to delivery, Years of experience both as die cutters & die makers
- Contact us to provide you with New solutions to your in-house die cutting operations. We have technical consulting services by experienced personnel. We have Total Quality Control processes from start to finish.
- We offer a competitive pricing structure that meets all your quoting and estimating needs.

Machining Services & Solutions

Tool Making

If you are looking for

Tooling designed for high performance and quality and yet at the prices that help you to stay more competitive, then Consider us your suppliers.

We have got all the expertise and experience

- **We bring our**
Customers the unique Advantage of Complete tooling Solution.
- **When Our customers**
Bring their tool design challenges to us,
they benefit from our experience;
in the commercial, defense, air-conditioning, manufacturing industries.
- **Our facilities are**
Completely temperature controlled eliminating any need to Compensate for expansion & contraction during the tool manufacturing and inspection cycle.
- **Due to the**
Size and complexity of major tools that are manufactured at our premises,



Jigs & Fixtures

- We are
Specialized in manufacturing of best quality jigs and fixtures
Press tools and special purpose machines.
- We At **Sabro**
Design and manufacture fixtures
For your latest automation and production lines.
- We have supplied
Jigs and fixtures for the different types of manufacturing industries.
- The core abilities
of our in-house jig and tool design facilities enable simple jigs & more complex
fixtures to be designed Suiting the customer's requirements.
We provide you customized jigs & fixtures, at competitive prices.



Mechanical Services

- CAD/CAM services; 3D Modeling
- Surface modeling; Solid modeling
- 2D to 3D conversion; Reverse engineering
- Art work CAD/CAM; Training
- Structural and motion analysis
- Product Designing & Development
- Mold-Tool designing & manufacturing
- Solid modeling - Surface modeling - Hybrid modeling
- Mold/Tool designing; CNC machining
- CAM design & Art work CAD/CAM



Machining Services & Solutions

Machining Services

We have the following machinery for mechanical field related needs

- Vertical Machining center 3000x1000x1000
- CNC milling 1500x1000x400
- CNC milling 700x500x300
- EDM
- CNC wire cut 2 no's
- Vertical Milling No-3 2 no's
- Horizontal milling No4
- Turret milling No-2 2 no's
- Surface grinder 250x600 Surface grinder 300x600
- Surface grinder 2000x1000
- Planer
- Radial Drill
- Vertical column drill
- Fan balancing machine
- Haco Omatic 212 RH CNC Punching
- Fanuc CNC-3 axis vertical machining Center



Fanuc Series-180MC-General Flow Operation

CNC-3 axis Vertical Machining center




Machining Services & Solutions

JP Dynamic Fan Balancing Machine


The Powerful Industrial Control Measuring Instrument JP 580-B

- Auxiliary assistance for correction, higher balance efficiency
- Rotation Range: 120-12000r/min
- Minimum Resolution: 0.01mg
- Shortest Measuring Time: 3s
- Measuring Dynamic Range: 1:100000
- **Place the rotor on the bearings, set the rotor parameters and start to run the rotor.**
- Adjust the photoelectric head (for belt drive balancing only) until the speed meter signal column changes, showing the speed & signal. Process bar starts to show the process once the speed reaches the set Rev.
- The Unbalance amount displays when the process is half. When the process is 100% done, it displays GOOD for approval of the balance or NOT for disapproval of the unbalance indicated in Green or Red as well. At this point/ time, digit displayed remains unchanged, suggesting the completion of the measuring process.

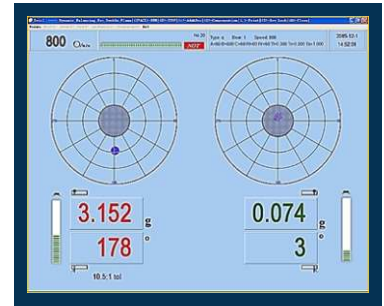

Haco Omatic 212 RH CNC Punching Machine

20 Stations Tool turret with 20 Tool Holders

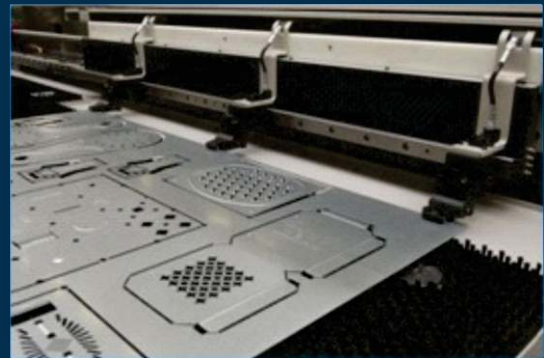

OUR MAJOR CLIENTS

Pharma

- AGP Pharma
- Aventis Pharma
- Abbott Laboratories
- Bio Labs
- GSK Pharma
- Glitz Pharma
- Glaxo Welcome Pharma
- Global Pharma
- High Noon Laboratories
- Hilton Pharma
- Hoechst Pharma
- Martin Dow
- Novartis Pharma
- Sci-Life Pharma
- Smithkline Beecham
- Sami Pharma
- SANOFI
- Vision Pharma
- Wyeth Laboratories



Hospitals

- Allied Hospital Faisalabad
- Agha Khan Hospital Karachi
- Civil Hospital Lahore
- Jinah Hospital Lahore
- Liaqat National Hospital Karachi
- Medicsi Hospital
- PIMS
- Sheikh Zayyed Hopital & Medical College RYK
- Shifa International Hospital



Universities, Colleges

- Akhtar Saeed Medical College Lahore
- Beacon House National University Lahore
- Islamia University Bahawalpur
- Lahore University of Management Sciences
- Pakistan School of Fashion Design Lahore
- NUST
- Quaid-e-Azam Medical College Bahawalpur



Telecom Sector

- Al-catel
- Al-Warid
- Huawei
- Mobilink
- Pak Telecom
- Telenor Pakistan Ltd.
- Teletcard
- World Call



MAJOR CLIENTS

Banks

- Citibank
- Hong Kong Association of Banks
- National Bank of Pakistan Ltd.
- UBL



Hotels, Marquees, Theatres, Clubs

- Avari Hotels
- Bahria Theatre, Bahria Town Lahore
- DESOM Club Lahore
- Holiday Inn
- Islamabad Club
- Marriott Hotels
- Mughal-e-Azam Lahore
- Pearl Continental Hotels
- Qasr-e-Noor Lahore
- Qasr-e-Noor Banquet Hall Country Club Lahore Cantt.
- Siddique Marriage Hall



Government Sector

- Art Council Sahiwal
- British High Commission
- CDA
- Lok Virsa Museum, Islamabad
- Pakistan Monument, Islamabad
- PTV
- Pakistan Railways
- Qatar Embassy
- State Life Insurance
- Sui Northern Gas Co. Ltd.



Air Ports

- Islamabad International Airport
- Q.A International Airport, Karachi



Poultry

- Islamabad Farm
- Islamabad Feeds
- Jadid Poultry
- KNN
- Sadiq Poultry
- Zubair Poultry



Pak Defence

- Army Welfare Trust
- Pakistan Army
- Pakistan Navy
- Pakistan Airforce
- PAEC



Commercial Buildings, Work sites

- FTC Building Karachi
- Atlas Honda Ltd.
- Bata
- Coca Cola
- Dvcom
- Fuji Films Ltd.
- Halliburton
- ICI Industries
- KFC
- Pakistan Tobacco Co.
- Pepsi
- Schlumberger
- Shell Pakistan Ltd.
- Services Industries
- Toyota Indus Motors, Karachi
- Unilever



EXPORT MARKET

Sabro quality products are being exported to below mentioned countries:

Exports World-wide

➤ Afghanistan		
➤ Bahrain		
➤ Kenya		
➤ Morocco		
➤ Qatar		
➤ Sri Lanka		
➤ UAE		



ACHIEVEMENTS

ACHIEVEMENTS

- 1985** 1st prize in national industrial exhibition held in Islamabad.
1986 Merit trophy for best industrialist by ICCI.
1989 Special prize in N.I exhibition Lahore by ministry of industries Punjab.
1991 Shield of valuable tax payer by Pakistan customs.
Special prize in science&technology fair Islamabad by Pakistan science foundation.
RCCI export trophy for excellent export performance of split units.
Merit trophy for best export performance by FPCCI.
Gold medal in 10th industrial exhibition by ICCI
1992 RCCI shield for the best performance in HVAC industry.
1993 Excellence award by Pakistan science foundation.
1994 Excellence award in 11th annual international industrial exhibition of Islamabad chamber of commerce.
Trophy expo94 by Pakistan scientific and technology information center.
1995 RCCI export trophy for excellent performance in export of split Acs.
Award in 6th all Pakistan software competition and exhibition.
Excellence quality award95 at industrial fair Lahore.
Award RAC95 at second national conference and exhibition
Award in 3rd national conference on RAC by HVACR society.
1996 Award in 4th national conference on RAC by HVACR society.
1997 Achieved ISO 9001 certificate.
Award in the 4th national conference exhibition on RAC.
1998 Excellence award by Islamabad chamber of commerce & industry.
Award in 5th national conference exhibition on RAC.
1999 Award in 6th national conference exhibition on RAC.
2000 Obtained Updated ISO 9001 certificate.
Produced spark free air conditioners for Qatar army.
Award in 7th HVACR expo Lahore.
Developed Microprocessor controller.
2001 Award in 8th HVACR expo Karachi.
2002 Tremendous increase in production capacity.
2003 Award in 10th HVACR expo Islamabad.
Expanding exports to Saudi Arabia, Kuwait, Qatar and Dubai.
Design, development and production of commercial units for Pak railway.





- 2004** Launching of polyurethane foaming setup (insulation density of 40 kg/m³)
Design, development and production of commercial units for Pak Navy.
- 2005** Award in 12th HVACR expo Lahore.
Launching of R & D village.
Foundation of Sabro Technology (Pvt.) Ltd.
Design, development and production of commercial units for PAF.
Achievement of biggest ever export order for Kuwait.
- 2006** Development of thermal break aluminum profile in commercial Air Handling units of all types.
Development and production in all types of commercial units CFC free (Environment Friendly) refrigerant.
- 2007** Development of shell & tube type shell.
Award in 14th HVACR expo Karachi.
- 2008** Development & production of precision air conditioners with latest techniques of dehumidification through infrared glass tubes heater.
- 2009** Research & development on propane heating systems.
Award in 16th HVACR expo Islamabad.
Branding of precision AC with a name LUCRE.
International Contract signed with Etiselat.
- 2010** Research & development on environment friendly refrigerant based HVAC systems.
- 2011** Design, development and production of commercial units for afghanistan.
- 2012** Design, development and production of BMS technology.
- 2013** Research & development on cost effective, energy efficient cooling/heating systems.
- 2014** Obtained BS EN ISO 9001:2008
- 2015** Design & development of precision design draw-through floor standing units.
- 2016** Design and development of precision cabinets for solar based power generation.
- 2017** Design and development of Air Cooled/Water Cooled Screw/Centrifugal Chillers..
- 2018** Development of **energy efficient Air/Water Cooled Screw/Centrifugal Chillers..**
- 2019/20** Development of **Plasma Air Sterilizers against COVID-19..**
- 2020/21** Development of **DESICCANT ROTOR BASED DeHumidification systems.**
- 2021/22** Development of **DC Invertor Commercial systems.**
- 2022/23** Development of **DC 24V-AC Package unit for vehicle air-conditioning.**
- 2022/23** Development of Direct-driven/Belt-driven **Plug Fans(Centrifugal Ventilators)..**



ACHIEVEMENTS



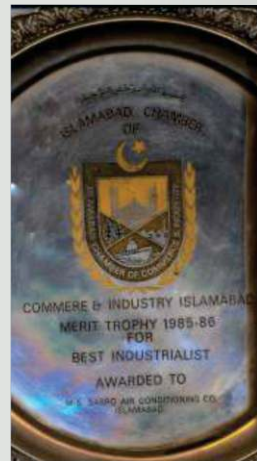

Export Awards

- Merit Trophy for Export Performance by FPCCI
- RCCI Export Trophy for excellent performance in Export of Split ACs
- Award in 6th All Pakistan Software Competition & Exhibition

Quality Awards

- 1995** Excellence Quality Award 95 in Industrial Fair Lahore
Award RAC 95 Second National Conference and Exhibition On Air Conditioning Refrigeration Technology
Obtained Award in 3rd National Conference On Air Conditioning & Refrigeration Technology Pakistan HVACR Society
- 1997** Achieved ISO 9002 Certificate
Award in the 4th National Conference Exhibition On PRC
- 2000** Obtained Updated ISO 9001 certificate.
- 2014** Obtained BS EN ISO 9001:2008
- 2018-19** Obtained Achievement Award in HVAC expo

COUNTRY SALES & SERVICE (NET-WORK)

Sabro is proud to have the biggest sales and service dealers network in Pakistan. Our sales & services network spans all over Pakistan.

- Islamabad
- Rawalpindi
- Lahore
- Faisalabad
- Multan
- Bahawalpur
- Hyderabad
- Sukkur
- Karachi
- Quetta
- Peshawar
- Sialkot
- Gujranwala
- Sargodha





**Made In
PAKISTAN**
Since 1968

Contact information:
contact@sabro.com.pk
Sabro Head Office:
#77/78, St: 10, I-9/2, Islamabad
+92 51 4433006